


# SATO CT4i

4 INCH DESKTOP LABEL PRINTER

## NEXT GENERATION OF DESKTOP PRINTERS

With a 32 bit RISC CPU, 6ips print speed, up to 609dpi resolution printing capability, high speed interfaces, including wireless connectivity, the CT4i series is a powerful performer in a compact design. The CT4i series is perfect for environments where space is a constraint. Its anti-microbial casing makes it most suitable for use in the healthcare environment where cleanliness and hygiene are factors that should not be compromised on.

The HF RFID option will help meet much-needed application requirements for compact RFID printing solutions.

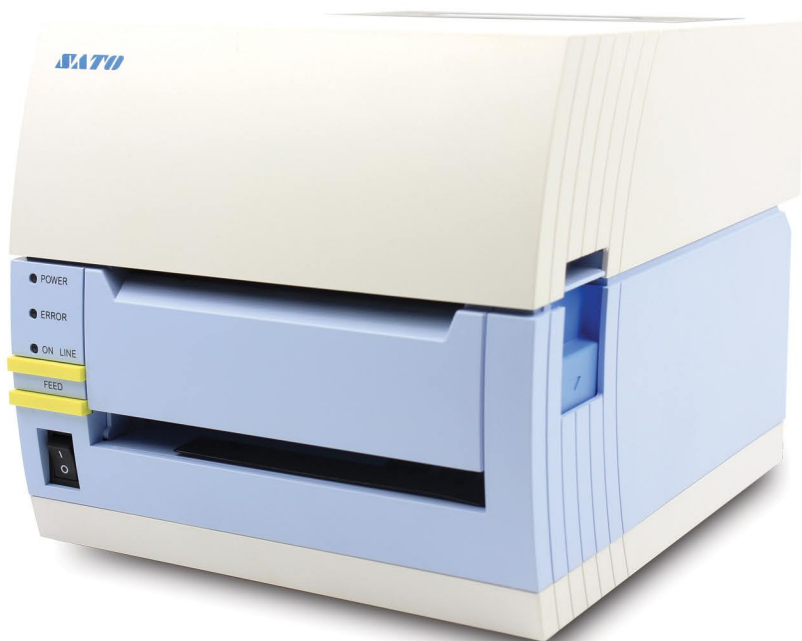

## PRINT SPECIFICATIONS

**Print Method:** Direct Thermal / Thermal Transfer

**Print Resolution:** 203, 305 or 609 dpi

**Print width:** 104 mm - 4.1"

**Print speed:** 152 mm/s (6 Inches Per Second)

102 mm/s (4 Inches Per Second)

76 mm/s (3 Inches Per Second)

**Emulations:** ZPL - EPL

**Interfaces:** USB - RS232C - USB - LAN

**Media Width:** 25 mm to 115 mm 0.98" to 4.53"

**Memory:** 8 MB RAM - 2 MB Flash

## FEATURES

- Quick and Efficient Setup
- Anti-Microbial Casing
- High Print Speeds
- User friendly
- Supports Linerless Labels
- Compact Design
- Label & Wristband Printing

AVAILABLE FROM  
**£721.00** EX.VAT



## CONSUMABLES

**Sensor Type:** I-Mark Sensor (Reflective), Label Gap Sensor (Transmissive)

**Media Type:** Roll or fan-fold die cut labels, Plain paper face stock, Synthetics and Continuous stock

**Media Thickness:** 0.06 – 0.19mm (0.002" – 0.007"

**Label Shape:** Max. outside diameter: Ø 110mm (4.33"), Core diameter: Ø 38.1mm (1.5")

**Ribbon: Width:** Width: 45mm (1.77") to 111mm (4.37") Max. Length: 100m (328')

## FONT / SYMBOLOGIES

**Fonts:** Bitmap Fonts Alphanumerical and Symbol: WB (18x30 dot), WL (28x52 dot), XU (5x9 dot), XS (17x17 dot), XM (24x24 dot), XB (48x48 dot), XL (48x48 dot), OCR-A (15x22 dot), OCR-A (22x23 dot), OCR-B (20x24 dot), OCR-B (30x36 dot)

**Barcode:** UPC-A/E, JAN/EAN-8/13, Code 39, Code 128, GS1-128 (UCC /EAN128), Codabar (NW-7), Interleaved 2 of 5, Bookland (2/5 char add-on code), GS1 Databar (RSS14), Composite JAN/EAN-8/13; Composite UPC A/E; Composite GS1 128/CC

**Print Rotation:** 0°, 90°, 180°, 270°

## OPERATING CHARACTERISTICS

**Power Requirements:** Input voltage adapter: AC100V-240V (auto switching)/40W (peak) – Input voltage printer: 19V/3A

**Environment:** Operating 0 – 35°C / 30 – 80% RH (without condensation)  
Storage -10 – 60°C / 15 – 85% RH (without condensation)

**Dimension:** (W x D x H): 198 x 225 x 181 mm (7.8" x 8.9" x 7.1")

**Weight:** 3.0kg (6.6lbs) (excluding AC-Adapter)

## MISCELLANEOUS

**Certifications:** FCC, UL, CSA, CCC, CE, ROHS compliant, Energy Star™

**Anti-microbial Finishing:** The material of the casing includes an anti-microbial substance which is tested according to the JISZ2801 standard  
The anti-microbial casing discourages the growth of bacteria and micro-organisms

## OPTIONS

**Accessories:** Cutter, Dispenser, RFID HF Kit 13,56Mhz, SATO Keypad, Unwinder, NiceLabel